



PEW U1 Non Weldable Polyester Enamel Wire 0.50mm-3.00mm for 155 Temperature Grade with Various Colors

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: PEWSC
- Certification: UL,ROHS
- Model Number: PEW U1
- Minimum Order Quantity: The MOQ Varies According to the Size of the Specification
- Price: Copper Price plus Processing Fee plus Freight
- Packaging Details: Box
- Delivery Time: 3-5 Work Days
- Payment Terms: T/T 100% Payment before Shipment
- Supply Ability: Delivery 10-15 Days after Next Order



Product Specification

- Warranty: 3 Years
- Product Name: PEW U1
- Conductor Material: Copper
- Voltage Rating: 2800V The Voltage Resistance Varies According To The Thickness Of The Film And The Size Of The Specification
- Thermal Class: 155
- Applications: For Small Motor
- Color Options: Could Be Customized
- Sample: Free
- Hierarchy Thickness: Class One
- Highlight: **0.50mm-3.00mm Polyester Enamel Wire, 155 Temperature Grade Polyester Enamel Wire, Various Colors Polyester Enamel Wire**



for more products please visit us on enamel-wire.com

Product Description


0.08mm-3.20mm polyester enamelled wire PEW U1 Non weldable 155 Thermal Class 155

Class 1 is a single-layer winding enameled wire, the winding is relatively simple, mainly used for low-power and low-current occasions.

PEW is a basic type of enameled wire using polyester as the insulating material. Compared with the aforementioned high-performance enameled wires, PEW has the following characteristics.

1. Lower cost. Because of the relatively simple use of polyester as the insulating layer, PEW is a cost-effective choice because of its low production cost.
2. good basic performance. the thickness of the insulation layer of PEW is generally 0.05-0.2mm, which can provide basic insulation protection.



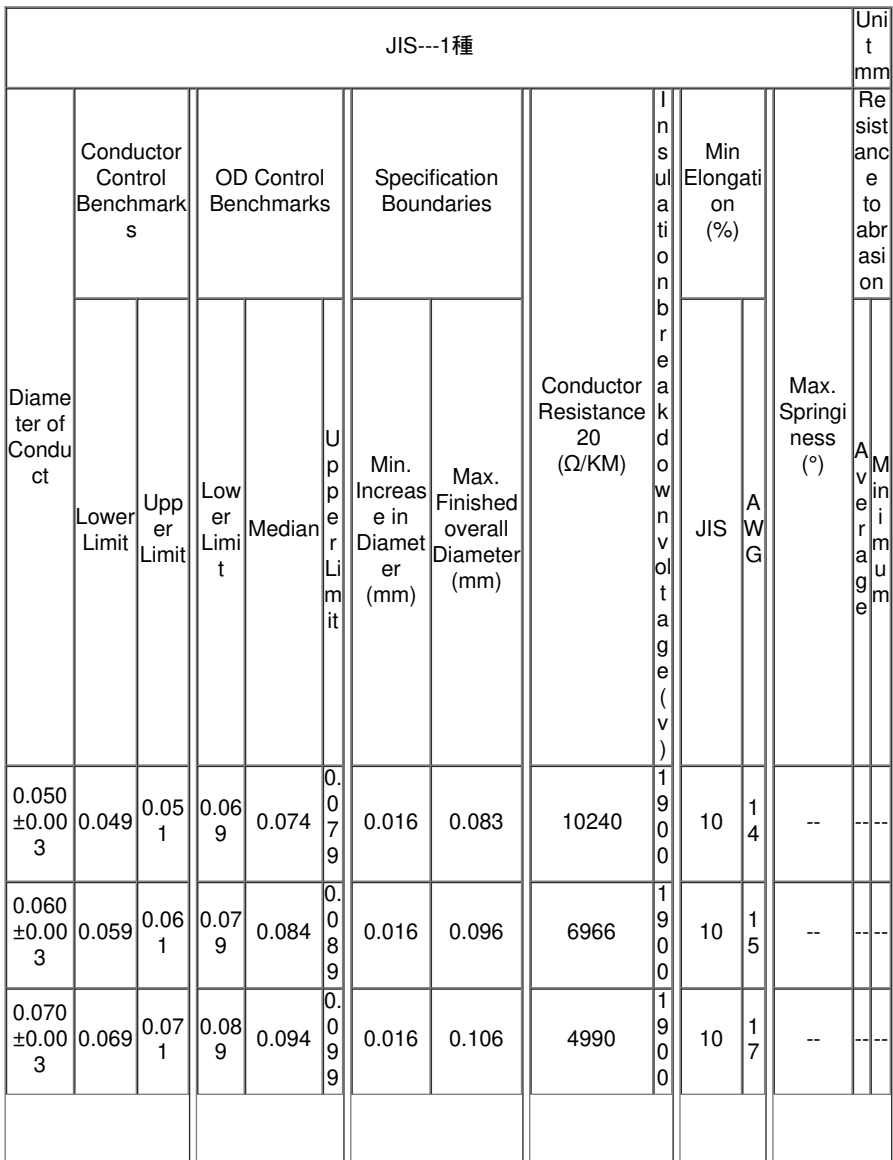

1.00±0.030	0.995	1.003	1.053	1.062	1.071	0.050	1.102	23.33	3400	25	32	58	874174
1.10±0.030	1.094	1.103	1.157	1.166	1.175	0.052	1.204	19.17	4150	25	32	54	878575
1.20±0.030	1.194	1.203	1.257	1.266	1.275	0.052	1.304	16.04	4150	25	32	54	879575
1.30±0.030	1.294	1.303	1.359	1.368	1.377	0.054	1.408	13.61	4150	25	33	50	973986
1.40±0.030	1.394	1.403	1.459	1.468	1.477	0.054	1.508	11.7	4150	25	33	46	984096
1.50±0.030	1.494	1.503	1.561	1.571	1.581	0.056	1.612	10.16	4150	25	33	46	103060
1.60±0.030	1.593	1.603	1.661	1.671	1.681	0.056	1.712	8.906	4150	25	33	42	104070
1.70±0.030	1.693	1.703	1.763	1.773	1.783	0.058	1.814	7.871	4350	25	33	--	108270
1.80±0.030	1.793	1.803	1.863	1.873	1.883	0.058	1.914	7.007	4350	25	34	--	108270
1.90±0.030	1.893	1.903	1.965	1.975	1.985	0.060	2.018	6.278	4350	25	34	--	112800
2.00±0.030	1.993	2.003	2.065	2.076	2.087	0.060	2.118	5.656	4350	30	34	--	112380
2.10±0.030	2.092	2.104	2.167	2.178	2.189	0.062	2.220	5.123	4350	30	34	--	116290
2.20±0.030	2.192	2.204	2.269	2.280	2.291	0.064	2.322	4.662	4350	30	35	--	1120200
2.30±0.030	2.292	2.304	2.369	2.380	2.391	0.064	2.422	4.260	4350	30	35	--	11202100
2.40±0.030	2.392	2.404	2.471	2.482	2.493	0.066	2.526	3.908	4350	30	35	--	11202200
2.50±0.030	2.492	2.504	2.573	2.585	2.597	0.068	2.628	3.598	4350	30	35	--	11313200
2.60±0.030	2.590	2.604	2.673	2.685	2.697	0.068	2.728	3.324	4350	30	35	--	11313200
2.70±0.030	2.69	2.704	2.773	2.785	2.797	0.068	2.828	3.079	4350	30	35	--	---
2.80±0.030	2.79	2.804	2.873	2.885	2.897	0.068	2.928	2.861	4350	30	36	--	---

2.90± 0.030	2.89	2.90 4	2.97 3	2.985	2.997	0.068	3.028	2.665	4 3 5 0	30	3 6	--	---
3.00± 0.030	2.990	3.00 4	3.07 3	3.085	3.097	0.068	3.128	2.489	4 3 5 0	30	3 6	--	---
3.20± 0.040	3.19	3.20 4	3.27 3	3.285	3.297	0.068	3.338	2.198	4 3 5 0	30	3 6	--	---



Pacific Electric Wire & Cable (Shenzhen) Co., Ltd.



13265485132



sales09@pewsc.com



enamel-wire.com

No.9 Jin Long 4 Road Bao long Industrail Estate Longgang,Shenzhen, China